

**HERCULES HOISTS LIMITED**



## **Chain Pulley Block Triple Spur Gear M Series**


- ◆ Lifting
- ◆ Moving
- ◆ Storing



- ▶ **CE & ISI CERTIFIED Chain Pulley Blocks**  
Assured Quality
- ▶ Capacity Range 1T to 10T
- ▶ Light weight and sturdy
- ▶ Ease of handling
- ▶ Lifelong lubrication
- ▶ Minimal maintenance required
- ▶ Surface hardened gears
- ▶ Extended working life
- ▶ Use of needle roller bearings
- ▶ High operating efficiency
- ▶ Smooth passage of load chain
- ▶ Machined guide rollers
- ▶ Smooth hand chain operation
- ▶ Unique cover design
- ▶ Self sustaining maintenance free friction brake.
- ▶ Reduced downtime
- ▶ Grade 80 load chain for strength & wear resistance
- ▶ Longer chain life
- ▶ Anti corrosive powder coated finish
- ▶ Better aesthetics

**Material Handling. Delivered.**

**Redefining Material Handling. Since 1962.**

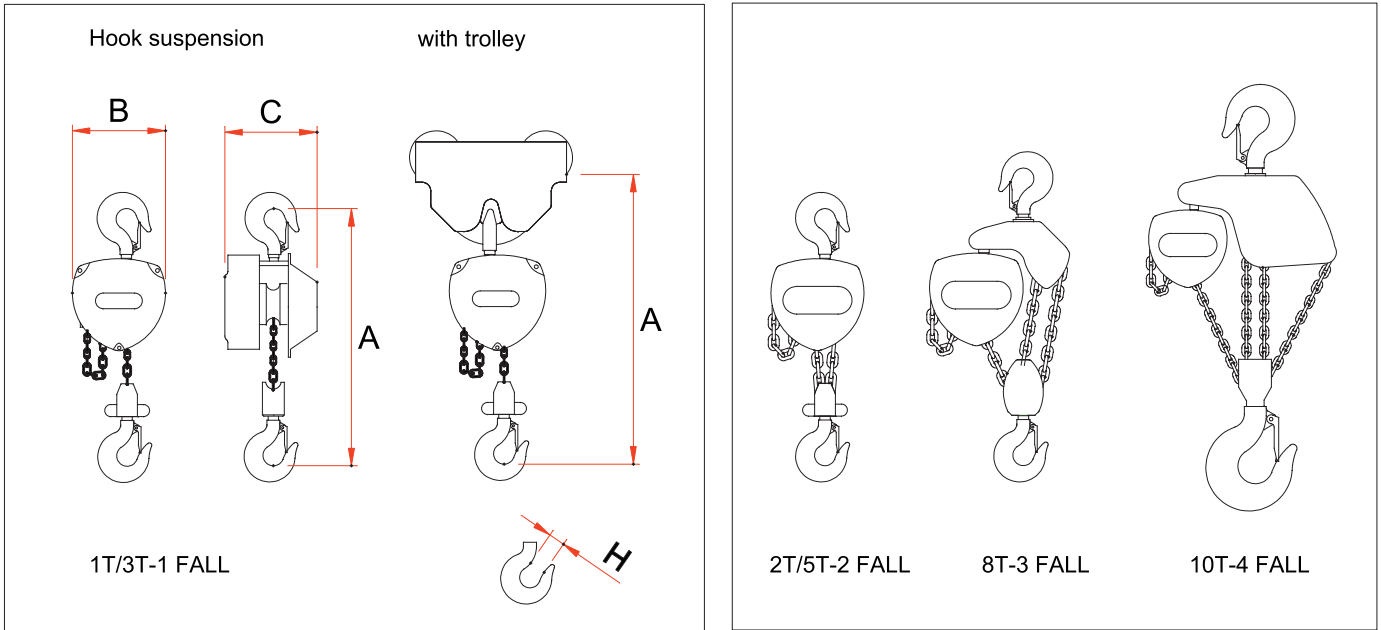


CAPACITY(T)	MT	1T	2T	3T	5T	8T	10T
Number of falls of load chain	Nos.	1	2	1	2	3	4
Load Chain size Dia.	mm	6.3	6.3	10	10	10	10
Hand Chain size Dia.	mm	5	5	5	5	5	5
A Hook suspension	mm	400	461	575	805	830	850
with trolley, range1&2	mm	430	500	705	895	980	880
with trolley, range3	mm	470	540	720	895	980	880
B	mm	180	180	238	280	430	480
C	mm	153	153	209	209	220	220
H	mm	32	32	42	51	75	75
• Weight at 3 M Lift	Kg.	13	19	29	59	94	130
• Extra weight per additional M lift	Kg.	1.8	2.6	3.0	5.7	7.9	10.1
• Running pull on hand chain	Kg.	30	33	37	41	46	43

Data tolerance ±10%

Note :- Due to continuous development and improvement specification listed above may be changed without notice.

HHL/Product Name/2021 14 10/V2

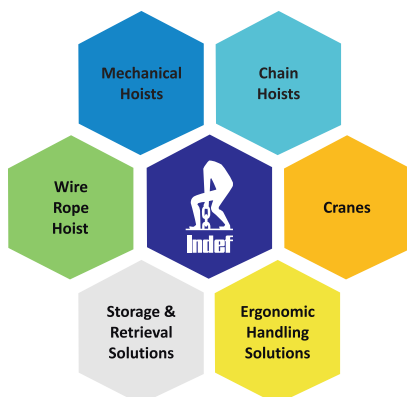

**HERCULES HOISTS LIMITED**

43/2B, Savroli-Kharpada Road, Dhamani, Khalapur - 410 202, Maharashtra, India

Regional offices: Chennai | Kolkata | New Delhi | Pune

Tel :+91 (0)2192 662511 | Fax: +91 (0) 2192 662504

www.indef.com | enquire@indef.com